


ISSUE	SUMMARY	
01	RELEASED	28 MAY 90

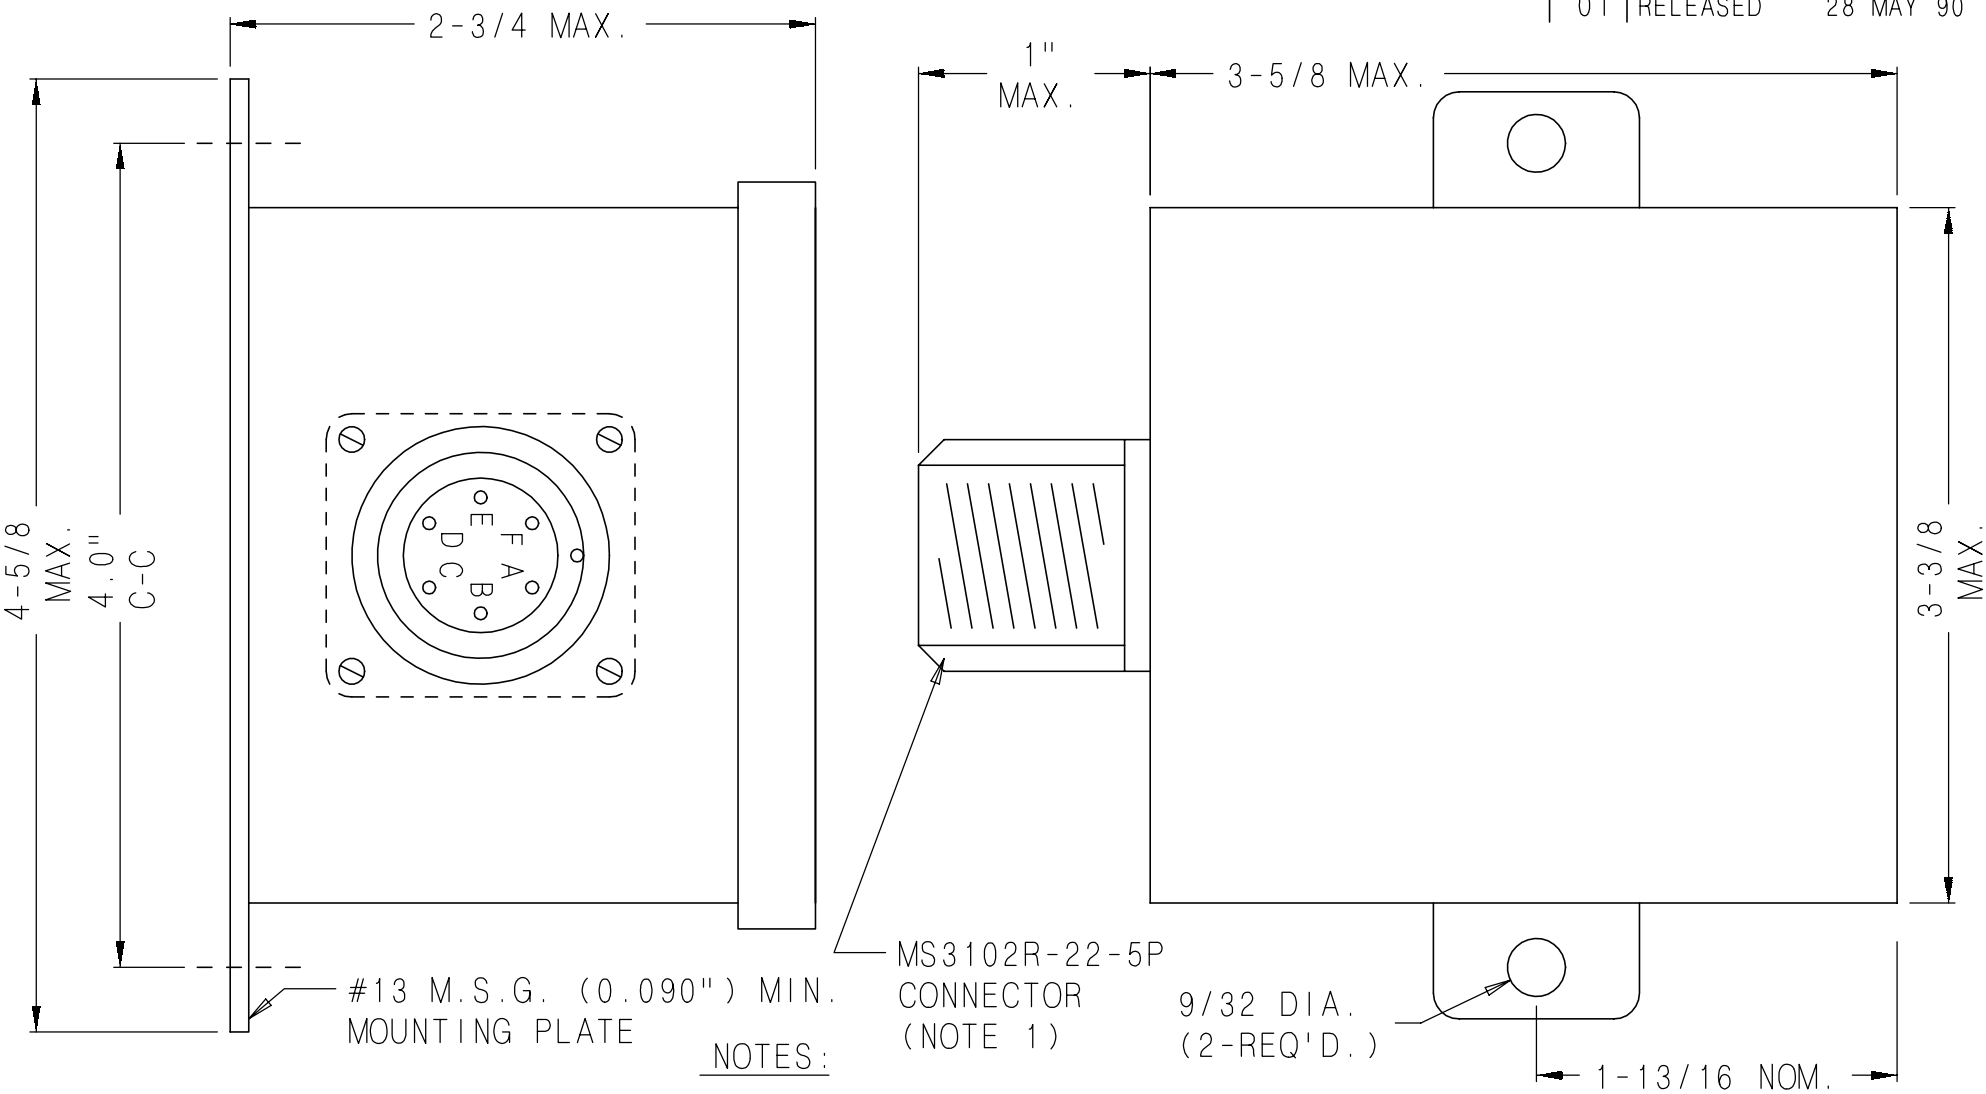

#13 M.S.G. (0.090") MIN.  
MOUNTING PLATE

MS3102R-22-5P  
CONNECTOR  
(NOTE 1)  
9/32 DIA.  
(2-REQ'D.)

NOTES:

- 1) MATING CONNECTOR: MS3106-22-5S (STRAIGHT TYPE) -or- MS3108-22-5S(RIGHT ANGLE TYPE). USE "R" TYPE (MS3106R) FOR WET LOCATIONS. USE SUITABLE CABLE CLAMP.
- 2) MOUNT ON BULKHEAD, FIREWALL OR RIGID STRUCTURE. MOUNT WITH CONNECTOR DOWN TO PREVENT FLUID ACCUMULATION IN CONNECTOR. THE UNIT ITSELF IS WATER TIGHT. MOUNT WITH TWO 1/4" OR M6 BOLTS. DO NOT MOUNT ON ENGINE.
- 3) OPERATING TEMPERATURE RANGE: -55 DEG. C to +105 DEG. C (-65 DEG. F to +220 DEG. F). STORAGE TEMPERATURE RANGE: -65 DEG. C to +210 DEG. C (-85 DEG. F TO +230 DEG. F)
- 4) CASE IS CIRCUIT GROUND (NEGATIVE) SUPPLY GROUND CAPABLE OF 5.0 AMPS (#16 AWG OR EQUIVALENT)
- 5) CASE IS NICKEL OR CADMIUM PLATED STEEL.

UNIT WEIGHT: 2.6 LBS. MAX.

MOUNTING DIMENSIONS MODEL SCM STARTER CONTROL MODULE COLUMBIA ENGINEERING & MFG. SKOKIE, ILLINOIS U.S.A.	
USED ON	RE-PLOT
DRN. <i>P</i>	DES.
APP.	DATE 28 MAY 90
DWG. B800 012	ISS. 1 SHEET 1 OF 1